

Trimble MX7 Mobile Imaging System

Key Features

Versatile system offers significant operational **flexibility**

Six 5 megapixel **cameras** provide **rapid 360-degree** image documentation

Precision positioning using tightly coupled GNSS and inertial referencing system

Deploys on **all sizes** of on- and off-road vehicles

Use with **Trimble Mobile Imaging Capture** software and **Trimble Trident** office software for data capture, extraction and analysis



ENTER THE WORLD OF MOBILE IMAGING

The Trimble® MX7 Mobile Imaging System with VISION™ technology, is a vehicle-mounted photogrammetric system that makes it easy to quickly and completely capture road and site infrastructure information. Capture 360-degree, 30 megapixel geo-referenced images at highway speeds to rapidly reduce project field time. Then, use Trimble Trident™ office software to extract and analyze your collected data. The Trimble MX7 is the ideal solution for organizations looking to enter the world of mobile imaging with a smaller investment.

Rapid Collection of Geo-Referenced Images

Capture a 30 megapixel panoramic image of the surrounding environment in static or mobile—up to highway speed—modes with the Trimble MX7. Equipped with six, 5 megapixel cameras and Trimble Applanix® GNSS and inertial geo-referencing modules, the Trimble MX7 enables you to manage assets—such as bridges, buildings, roads, highways, and power stations—and document site conditions with geo-referenced images. This compact, lightweight, and rugged sensor can be mounted on vehicles of all sizes.

System control and data recording functions are controlled wirelessly through any WiFi enabled PC or tablet device. Trimble Mobile Imaging Software is available with the system and offers a clear, intuitive user interface—making it easy to use—allowing the operator to rapidly set system parameters and manage data recording.

Capture Now, Measure Later

Avoid site rework and benefit from increased quality control and data validation by capturing the data now and measuring later. The Trimble MX7 allows you to visually observe and capture the job site, then produce deliverables in the office later using Trimble Trident and Applanix POSPac™ MMS software.

Trident Imaging Hub software is available with the system and offers robust object positioning, measurement, data layer creation, and analysis of geo-referenced imagery. This powerful software gives you the ability to extract additional data and features without having to re-visit the site. For post-processing requirements, use Trimble's powerful Applanix POSPac MMS software.


Trimble MX7 Mobile Imaging System

PERFORMANCE AND SPECIFICATION

System Specification	
Resolution	30 MP (5 MP x 6 sensors)
Field of view	90% of full sphere
Spherical distance	Calibrated from 2 m to infinity
Operating temperature	0 °C to +35 °C
Power	12 V to 24 V (typical 100 W)
Weight	9 kg
Positioning Sub-system (RMS Error) ¹	
Type	Trimble AP15 GNSS-Inertial System
Technology	Advanced Applanix IN-Fusion™ GNSS-Inertial integration technology
# of GNSS channels	220
Inertial measurement unit	Applanix IMU-69 (non ITAR) with 200 Hz data rate
Position (m): No GNSS outages ^{2,4} 1 km or 1 minute GNSS outage ^{2,4}	0.02–0.05 (post-processed) ² 0.2–0.8 (post-processed) ²
True Heading (deg): No GNSS outages ^{2,4} 1 km or 1 minute GNSS outage ^{2,4}	0.08 (post-processed) ³ 0.2 (post-processed) ³

Trimble Trident	
Trajectory import	
Camera boresight calibration	
Database connectivity	
Photogrammetric feature addition	
3D measurements	
360° imagery visualization	
Image converter	
SHP/DXF import and export	

Options	
Analysis	Applanix POSPac MMS
Positioning	Distance measurement indicator (DMI)
Accessory	Mechanical height extender

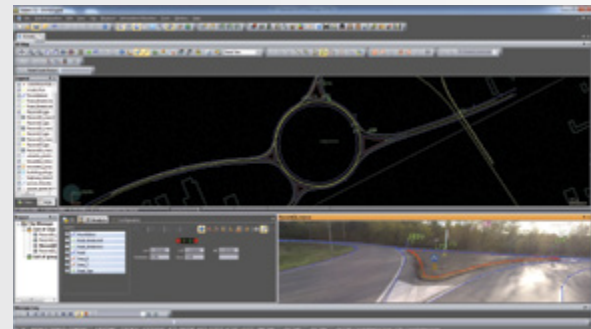

© 2014-2015, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo, and eCognition are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. Trident and VISION are trademarks of Trimble Navigation Limited. All other trademarks are the property of their respective owners. PN 022516-126D (11/15)

1 Typical performance in a standard road vehicle with appropriate initialization and dynamics. Actual results are dependent upon satellite configuration, atmospheric conditions and other environmental effects.
 2 Typical mission profile, max RMS error.
 3 POSPac MMS.
 4 With DMI option.

Specifications subject to change without notice.

TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

NORTH AMERICA

Trimble Navigation Limited
 10368 Westmoor Dr
 Westminster CO 80021
 USA

EUROPE

Trimble Germany GmbH
 Am Prime Parc 11
 65479 Raunheim
 GERMANY

ASIA-PACIFIC

Trimble Navigation
 Singapore Pty Limited
 80 Marine Parade Road
 #22-06, Parkway Parade
 Singapore 449269
 SINGAPORE

